

M8

0810 ... 0...

Cordsets M8



Actuator/sensor cordset with overmolded connector

Cable end 1:

M8 male, straight, A-coded, IP67

Cable end 2:

blunt cut


Cable:

PVC, black

Approvals:



M8 0810 ... 0...

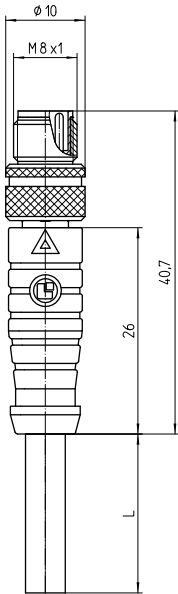

Environmental conditions

Temperature range -25 °C/+80 °C

Materials

Insulating body TPU GF, HB according to UL94
 Contact pin CuZn, pre-nickel and gold-plated
 Overmolding/handle PVC, HB according to UL94
 Knurled screw CuZn, nickel-plated


Mechanical data

Mating cycles ≥ 100
 Insertion force ≤ 23 N¹
 Withdrawal force ≤ 23 N¹
 Protection class IP67²

¹ measured with a proper counterpart

² according to IEC DIN EN 60529, only in locked condition with an appropriate counterpart

Pin assignments for male M8 connectors, A-coded, front view

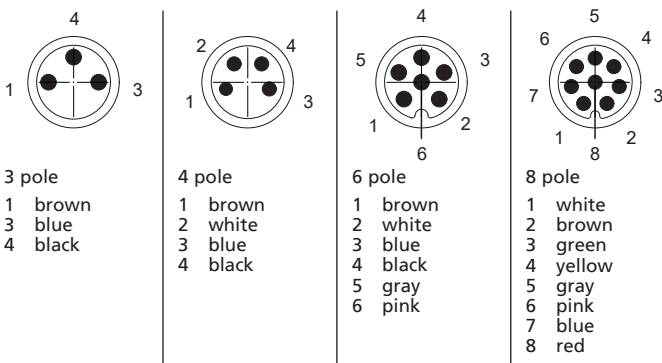

Connected cable

Outer jacket PVC, black

Electrical data (at T_{amb} 20 °C)

Contact resistance ≤ 10 mΩ
 Rated current 4 A (3-4 poles)
 1.5 A (6-8 poles)
 (T_{amb} 40 °C)
 Rated voltage 48 V AC/60 V DC (3-4 poles)
 32 V AC/DC (6-8 poles)
 (with pollution degree 3)
 Rated impulse voltage 1.5 kV (3-4 poles)
 0.8 kV (6-8 poles)
 Material group I (IEC)/0 (UL) (CTI = 600)
 Overvoltage category III
 Insulation resistance > 100 MΩ

Associated products

- Counterparts
- | | | |
|----------------------|-------------------------|--------------------|
| ☞ 0800 ... 0... | ☞ 0800 ... 3... | ☞ 0800F1 ... 0... |
| ☞ 0800F1 ... 3... | ☞ 0805 ... 0... | ☞ 0805 ... 3... |
| ☞ 0805F1 ... 0... | ☞ 0806 ... L1 0... | ☞ 0806 ... L1 3... |
| ☞ 0820 ... T8CW ... | ☞ 0821 ... T10CP | ☞ 0822 ...S9 T8CP |
| ☞ 1210 0800 ... 3... | ☞ 1210 0806 ... L1 3... | ☞ 5000 04L1 3... |
| ☞ 5000 08L1 3... | ☞ 5000 10L1 3... | ☞ 5000 12L1 3... |

M8

0810 ... 0...

-
- [5012 02 MFF](#)
 - [5012 04L1](#)
 - [5012 08L1](#)
 - [5012 10L1](#)

- Accessories
- [9908 CPM0](#)
-

M8

0810 ... 0...

Designation	Pole Number	Connected Cable	PU (Pieces)	MDQ (Pieces)	Dimensions L (mm)
0810 03 001 2m	3	PVC, black, 3 x 0.34 mm ² (AWG 22), 910001, UL-style 2464	5	10	2000
0810 03 001 5m	3	PVC, black, 3 x 0.34 mm ² (AWG 22), 910001, UL-style 2464	1	10	5000
0810 04 002 2m	4	PVC, black, 4 x 0.34 mm ² (AWG 22), 910002, UL-style 2464	5	10	2000
0810 04 002 5m	4	PVC, black, 4 x 0.34 mm ² (AWG 22), 910002, UL-style 2464	1	10	5000
0810 06 024 1m	6	PVC, black, 6 x 0.25 mm ² (AWG 24), 910024, UL-style 2464	5	10	1000
0810 06 024 2m	6	PVC, black, 6 x 0.25 mm ² (AWG 24), 910024, UL-style 2464	5	10	2000
0810 06 024 5m	6	PVC, black, 6 x 0.25 mm ² (AWG 24), 910024, UL-style 2464	1	10	5000
0810 08 025 1m	8	PVC, black, 8 x 0.14 mm ² (AWG 26), 910025, UL-style 2464	5	10	1000
0810 08 025 2m	8	PVC, black, 8 x 0.14 mm ² (AWG 26), 910025, UL-style 2464	5	10	2000
0810 08 025 5m	8	PVC, black, 8 x 0.14 mm ² (AWG 26), 910025, UL-style 2464	1	10	5000

Packaging:
in a plastic bag