

M8

5000 12L1 3...

Passive Actuator/Sensor Distribution Boxes M8





Passive distribution box M8, 12-port, single signal, with LEDs, IP67


Main connection:

cable, PUR, grey


M8 5000 12L1 3...

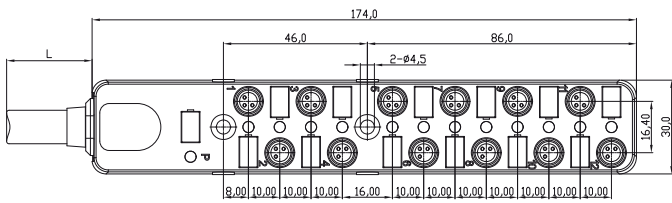

Wiring diagram

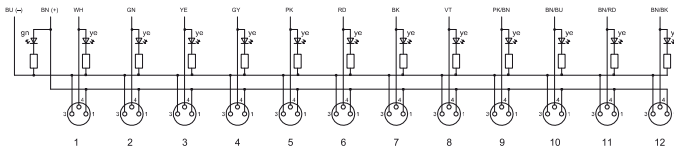

Pin assignment of female M8 connectors



- 3 pole
- 1 +
- 3 -
- 4 S1

Environmental conditions

Temperature range -40 °C/+80 °C

Materials

Insulating body	PA, V-2 according to UL94
Contact	CuZn, pre-nickel and gold-plated
Connector thread	CuZn, nickel-plated
Housing	PC/ABS
Resistance	Good resistance against chemicals and oils. Resistance against aggressive media to be individually verified for each application.

Mechanical data

Protection class IP67¹

¹ according to DIN EN 60529, only in locked position with proper counterparts or protective caps

Electrical data (at T_{amb} 20 °C)

Contact resistance	≤ 5 mΩ
Nominal current	≤ 2 A per port ≤ 8 A total
Nominal voltage	10–30 V DC (24 V DC)

Associated products

Counterparts			
☞ 0810 ... 0...	☞ 0810 ... 3...	☞ 0810 0800 ... 0...	
☞ 0810 0800 ... 3...	☞ 0810 0805 ... 3...	☞ 0810 0806 ... L1 3...	
☞ 0815 ... 0...	☞ 0815 ... 3...		
Accessories			
☞ 9908 CPF0	☞ 9950 LB PF20		

M8

5000 12L1 3...

Designation	Pole Number	Connected Cable	PU (Pieces)	MDQ (Pieces)	Dimensions L (mm)
5000 12L1 316 5m	12 x 3	PUR, grey, 12 x 0.22 mm ² (AWG 24)/2 x 0.5 mm ² (AWG 21), 910316, UL-style 20549	1	1	5000

Packaging:
 in a plastic bag